



Sanicondens® Clim Mini S

The new scaled down generation of pump for wall air conditioners, designed to meet market requirements and is now equipped with the best features.



pack includes a fixing plate

TECHNICAL CHARACTERISTICS

Low Noise Level	21 dB(A)
Possible Connections	Air conditioners up to 8kW / 27 000 BTU
Ø int. Inlet	16 mm
Ø int. Discharge Pipework	6 mm
Maximum flow	9 l/h +/- 15%
Maximum Incoming Water Temperature	35 °C
Maximum Suction Lift (between the detection unit and the pump)	2 m
Voltage	220-240 V
Supply Frequency	50 Hz
ax Power	22 W
IP Rating Index	IP20




WHY CHOOSE THIS PRODUCT?

Designed for air conditioner split systems

Very quiet operation

A compact pump for hidden installation inside head unit

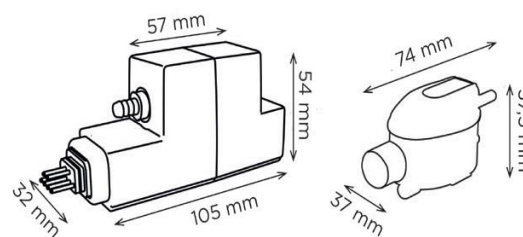

FLOW RATE PERFORMANCE CHART

Discharge height (m)

