



APPLICATIONS



REFRIGERATOR



AIRCONDITIONER

PRODUCT REFERENCE:  
SA92

# Sanicondens® Pro

The Sanicondens® Pro is specifically designed for disposal of condensate from air conditioning units, refrigeration units, ice machines and dehumidifiers etc. Includes a non-return valve and 6 m flexible discharge pipe.




## TECHNICAL CHARACTERISTICS



<b>Discharge Pipework</b>	8/11 mm
<b>Motor Power</b>	60 Watts
<b>Flow Rate</b>	342 L/h
<b>Voltages</b>	220-240 V/50 Hz
<b>Tank Volume</b>	2 L
<b>Working Waste Water Temp</b>	35°C/Max 80°C (intermittent)
<b>Product Weight</b>	2 kg
<b>Overall Measurements</b>	260 x 169 x 143 mm
<b>Inlet Pipework</b>	25 mm
<b>IP Rating</b>	IP20

## WHY CHOOSE THIS PRODUCT?

- 2 L tank
- Two entry points
- Working temperature of 35°C.
- Will handle temperatures up to 80°C for short periods (5 minutes)
- Supplied with 2 m of electric cable and 6 m of discharge pipe
- High level alarm connectivity

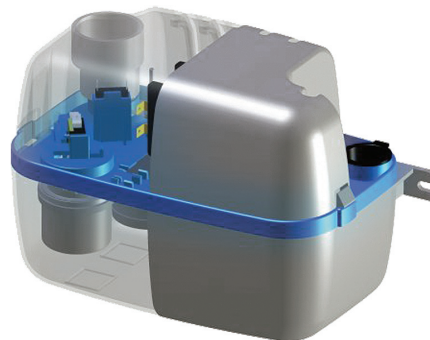

## VERTICAL/HORIZONTAL PERFORMANCE

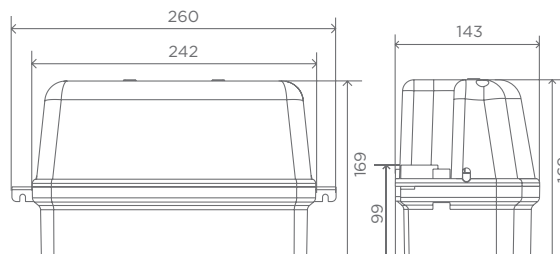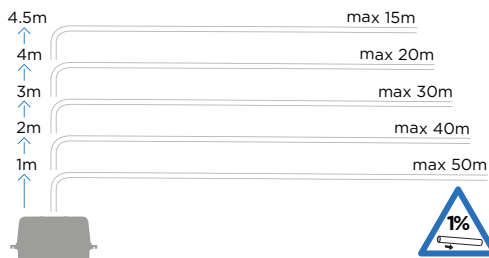

Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber