



APPLICATIONS



TOILET



HAND BASIN



SHOWER



WMTS 106:2019
Certificate No. 23048
Manufacturer: SFA
Brand: Saniflo

PRODUCT REFERENCE:
SA96

Sanipro®

Sanipro® is the ideal option for installing a toilet, hand basin and shower.




TECHNICAL CHARACTERISTICS

Discharge Pipework	20 mm
Motor Power	400 Watts
Voltages	220-240 V/50 Hz
Working Waste Water Temp	35°C
Product Weight	6.4 kg
Overall Measurements	413 x 265 x 179 mm
Inlet Pipework	40 mm
IP Rating	IP44


WHY CHOOSE THIS PRODUCT?

- Compact neat and unobtrusive
- Capacity for en-suite installation
- Quiet technology
- Factory pre-mounted non return valve (supplied)
- Macerator needs minimum 4.5 L of unrestricted flush for optimal function
- Can be equipped with Sanialarm (sold separately)

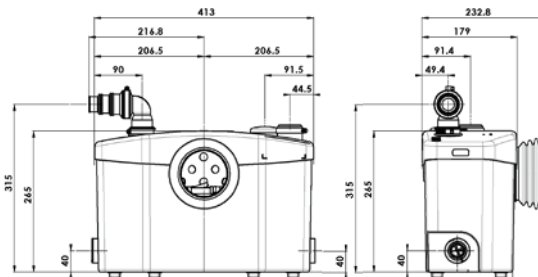

VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

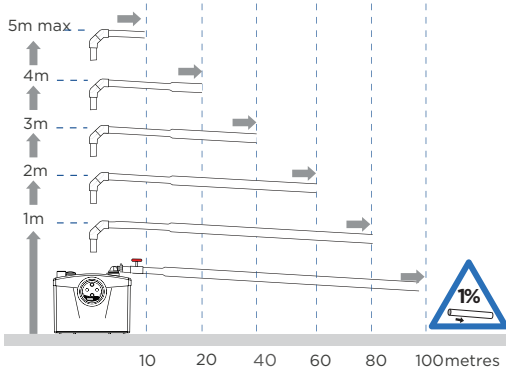

FLOW RATE PERFORMANCE CHART

